


# Industrial Tilt Float Switch

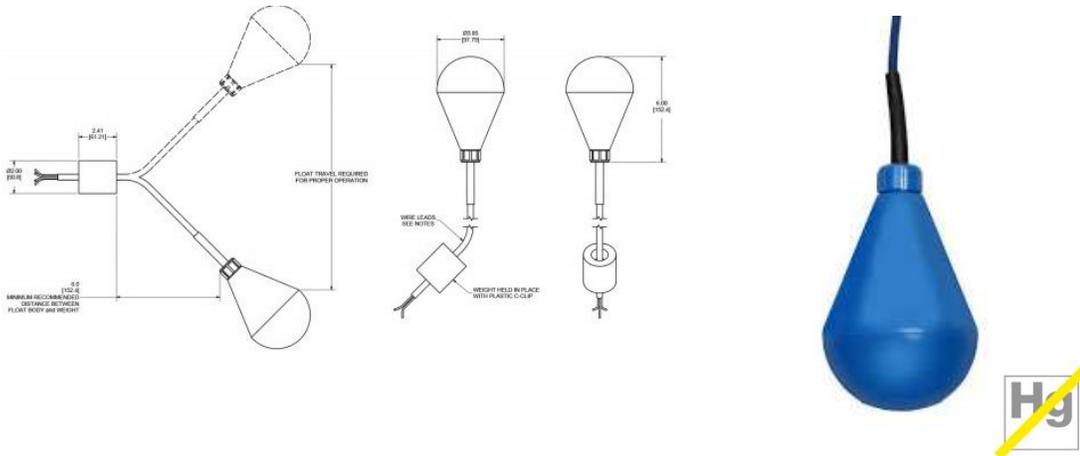

## Model # FLOME01

Single point detection when unit cannot be rigidly mounted in larger tanks or ponds  
 Polypropylene holds up well in acidic or alkaline liquids  
 FDA approved for food contact  
 Can be used in low temperature food equipment applications (up to 221°F, 105°C) such as food service steamers and proofers

## Specifications

Float material	Polypropylene
Lead Wires	10Ft 18AWG, 3 conductor, PVC - H07 RN jacketed cable
Max. Pressure	14.5PSI
Max. Temperature	158°F 70°C
Other Wetted materials	Polypropylene
Switching Rating	16Amp at 250VAC, (8Amp switching) SPDT (Single pole double throw)
Type	Tilt float
Function	NO/NC
Application	For black water systems, drainage plants and pumping stations
Protection degree	IP68