


Línea / Line A

Monoresorte / Single spring



Asiento / Seat

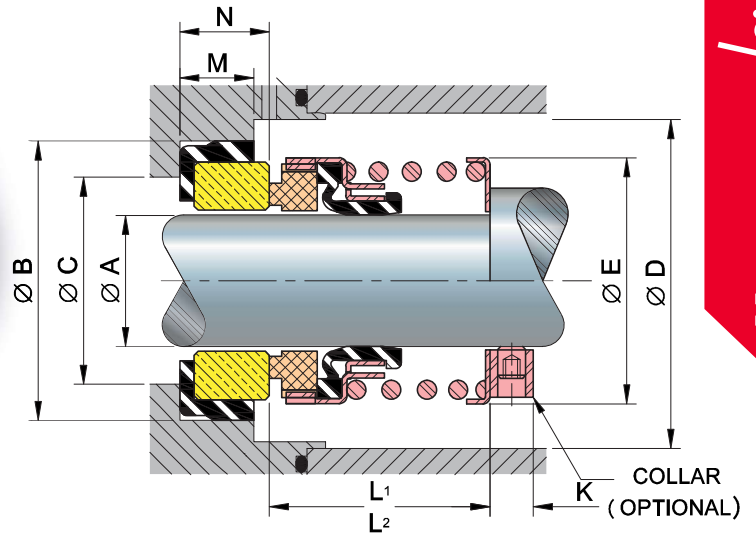

Dimensiones (Pulgadas) Dimensions (Inches)

A	B	C	D	E	L ₁	L ₂	K	M	N
±0.002	±0.002	REF.	MIN.	MAX.	±0.020	±0.020	±0.005	±0.005	±0.015
3/8	0.875	0.625	1.062	0.937	1.188	0.812	0.312	0.250	0.312
1/2	1.000	0.750	1.187	1.062	1.188	0.812	0.312	0.250	0.312
5/8	1.250	0.937	1.343	1.218	1.312	0.875	0.312	0.344	0.406
3/4	1.375	1.062	1.468	1.343	1.312	0.875	0.375	0.344	0.406
7/8	1.500	1.187	1.656	1.531	1.375	0.937	0.375	0.344	0.406
1	1.625	1.312	1.750	1.625	1.562	1.000	0.375	0.375	0.438
1-1/8	1.750	1.437	1.870	1.745	1.625	1.062	0.375	0.375	0.438
1-1/4	1.875	1.562	2.000	1.875	1.625	1.062	0.375	0.375	0.438
1-3/8	2.000	1.687	2.125	2.000	1.687	1.125	0.375	0.375	0.438
1-1/2	2.125	1.812	2.250	2.125	1.687	1.125	0.375	0.375	0.438
1-5/8	2.375	2.000	2.500	2.375	2.000	1.375	0.375	0.438	0.500
1-3/4	2.500	2.125	2.625	2.500	2.000	1.375	0.375	0.438	0.500
1-7/8	2.625	2.250	2.750	2.625	2.125	1.500	0.375	0.438	0.500
2	2.750	2.375	2.937	2.812	2.125	1.500	0.375	0.438	0.500
2-1/8	3.000	2.500	3.125	3.000	2.375	1.687	0.500	0.500	0.562
2-1/4	3.125	2.625	3.250	3.125	2.375	1.687	0.500	0.500	0.562
2-3/8	3.250	2.750	3.375	3.250	2.500	1.812	0.500	0.500	0.562
2-1/2	3.375	2.875	3.500	3.375	2.500	1.812	0.500	0.500	0.562
2-5/8	3.375	3.000	3.750	3.625	2.750	1.937	0.500	0.562	0.625
2-3/4	3.500	3.125	3.875	3.750	2.750	1.937	0.500	0.562	0.625
2-7/8	3.750	3.250	4.000	3.875	2.875	2.062	0.500	0.562	0.625
3	3.875	3.375	4.187	4.062	2.875	2.062	0.500	0.562	0.625

Dimensiones dentro de la Norma ASTM (Excepto Columna "C").

La Columna "C" depende del fabricante de la bomba.

Dimensions within the ASTM standard (except column "C")

Information in column "C" depends on the manufacturer of the pump.

Materiales / Materials

-  Partes metálicas
Metal Parts > Acero Inoxidable 304
Stainless Steel 304
-  Resorte
Spring > Acero Inoxidable 304
Stainless Steel 304
-  Cara Rotativa
Rotary Face > Carbón Fenólico, Carbón Grafito, Carburo de Silicio
Phenolic Carbon, Graphite Carbide, Silicon Carbide
-  Empaque
Bellow > NBR (Nitrilo), FKM (Vitón®), CR (Neopreno®), EPR (EPDM)
NBR (Nitrile), FKM (Viton®), CR (Neoprene®), EPR (EPDM)
-  Asiento
Seat > Cerámica, Carburo de Silicio, Carburo de Tungsteno, Acero Inoxidable, Ni-Resist
Ceramic, Sintered Silicon Carbide, Tungsten Carbide, Stainless Steel, Ni-Resist

Ficha técnica



Data Sheet

